

M-1 Pro II

CABLE I.D. PRINTER

Application Software for M-1 Pro II

User's Guide

CANON FINETECH INC.

Copyright© 2008 CANON FINETECH INC. All rights reserved.

4Y2-8164-020

Trademarks

Microsoft[®], Windows[®], Windows NT[®] and Windows Vista[™] are registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Abbreviations

Throughout this document the following abbreviations are used in text.

- Microsoft[®] Windows Vista[™] is abbreviated as “Windows Vista”
 - Microsoft[®] Windows[®] XP is abbreviated as “Windows XP”
 - Microsoft[®] Windows[®] 2000 is abbreviated as “Windows 2000”
 - Microsoft[®] Windows[®] Millennium Edition is abbreviated as “Windows Me”
 - Microsoft[®] Windows NT[®] Workstation 4.0 is abbreviated as “Windows NT ”
 - Microsoft[®] Windows[®] 98 is abbreviated as “Windows 98”
-

CANON FINETECH SOFTWARE LICENSE AGREEMENT

Note: Please read the following software license agreement (to be referred to as the "Agreement") carefully. This Agreement is made between Canon Finetech Inc. (to be referred to as "Canon Finetech") and the user for use of software (to be referred to as the "Software," and to include manuals, printed matter and so forth in addition to this Agreement) provided with this Agreement by the user for the purpose of using the applicable printer made by Canon Finetech (to be referred to as the "Printer").

The user shall be presumed to have agreed to this Agreement either by taking an action that indicates "Consent" to the terms of the Agreement or by using the Software. The user shall not be permitted to use the Software in the case of not agreeing with the Agreement.

1. License

(1) Canon Finetech shall grant the user non-exclusive license to install the Software into a single computer and use such installed Software on such single computer at a time for the purpose of using the Printer. The user may not use the Software on plural computers at a time or on a network.

(2) The user shall be permitted to make one reproduction of the Software as a backup for using the Software on the basis of clause (1) above.

(3) With the exception of that stipulated in clauses (1) and (2) above, any and all of intellectual property rights of Canon Finetech or licensors of Canon Finetech, whether express or implied, shall not be transferred or licensed to the user by this Agreement.

2. Restrictions on Use

(1) The user shall not allow the Software to be used by a third party by sub-licensing, transfer, sales, distribution, lease, loan or any other method.

(2) The user shall not be permitted to revise, modify, decompile, disassemble or perform any other form of reverse engineering on all or any portion of the Software. The user shall also not allow such actions to be taken by a third party.

3. Title

Title and ownership relating to the Software shall be retained by Canon Finetech or a licensor of Canon Finetech depending on their contents.

4. Copyright Markings

The user shall not alter, remove or delete any copyright markings of Canon Finetech or a licensor of Canon Finetech contained in the Software.

5. Disclaimer and Exemption of Warranties

(1) The Software is licensed "as is". Canon Finetech, Canon Inc. that is parent company of Canon Finetech (to be referred to as the "Canon"), affiliates of Canon (exclude Canon Finetech, to be referred to as "Affiliates") and their agents or vendors shall not make any warranty, whether express or implied, including warranty of product feasibility or suitably to a specific purpose, with respect to the Software.

(2) Canon Finetech, Canon, Affiliates and their agents or vendors shall not be liable, as recognized by applicable laws, for any damages incurred due to the use or inability to use the Software (referring to all damages, including, but not limited to, lost profit and other derivative or incidental damages). This shall apply similarly even if Canon Finetech, Canon, Affiliates and their agents or vendors were informed of the possibility of said damages.

(3) Canon Finetech, Canon, Affiliates and their agents or vendors shall not bear any liability regarding any and all disputes arising between the user and a third party caused by or related to use of the Software.

6. Export

The user shall not export, either directly or indirectly, all or any portion of the Software without obtaining the required approval from the Japanese government or related foreign governments.

7. Term of Agreement

(1) This Agreement shall come into effect at the time the user has taken an action that indicates "Consent" to the terms of the Agreement or at the time the Software has been used, and shall remain in effect until terminated in accordance with clause (2) or (3) below.

(2) The user shall be able to terminate this Agreement by discarding and erasing the Software and all of its reproductions.

(3) This Agreement shall terminate immediately when the user has violated any of the terms of the Agreement.

(4) If the Agreement has been terminated as result of clause (3) above, the user shall promptly discard or erase the Software and all of its reproductions.

8. U.S. Government Restricted Rights Notice

The Software is a "commercial item," as that term is defined at 48 C.F.R. 2.101 (Oct. 1995), consisting of "commercial computer software" and "commercial computer software documentation," as such items are used in 48 C.F.R. 12.212 (Sept. 1995). Consistent with 48 C.F.R. 12.212 and 48 C.F.R. 227.7202-1 through 227.7202-4 (June 1995), all U.S. Government End Users shall acquire the Software with only those rights set forth herein. The manufacturer is Canon Finetech Inc., 5540-11 Sakatemachi, Joso-shi, Ibaraki 303-8503, Japan. The term "the Software" used in this clause refers to and indicates the "Software" defined in this Agreement.

9. Separable Agreement

In the case it has been determined that a portion of any of the terms of this Agreement become invalid by law, the other terms of the Agreement shall remain completely in effect.

Canon Finetech Inc.

Contents

| | |
|--|-----------|
| CANON FINETECH SOFTWARE LICENSE AGREEMENT | i |
| Contents | ii |
| Introduction | 1 |
| Conventions Used in This Manual | 1 |
| System Requirements | 2 |
| Installing | 3 |
| Installing M-1 Pro II PC and the Printer Driver | 3 |
| Installing the Printer Driver at a Later Time | 14 |
| Uninstalling the Software | 14 |
| Starting M-1 Pro II PC | 15 |
| Starting | 15 |
| Shutting Down | 15 |
| Screen Structure | 16 |
| Main Screen | 16 |
| Toolbar | 17 |
| Style Settings/Data Display Area | 17 |
| Data List | 17 |
| Menu Bar | 18 |
| Status Bar | 20 |
| Operating M-1 Pro II PC | 21 |
| File Types | 21 |
| Basic Operations | 22 |
| Creating a New Data List | 22 |
| Opening Existing Files | 23 |
| Loading Additional Data | 24 |
| Saving Data Lists | 24 |
| Sending Data to the Printer | 26 |
| Creating Numbering | 28 |
| Format Settings | 29 |
| Remote Operation | 31 |
| Starting Printing | 31 |
| Saving Print Data | 32 |

Introduction

This manual contains descriptions of operating instructions for the Application software “M-1 Pro II PC”.

Please read this manual carefully to ensure correct operation.

This manual has been written with the assumption that users have knowledge of basic Windows operations and functions. We recommend that users familiarize themselves with the Windows environment before using M-1 Pro II PC. For details about Windows terminology or operations such as ‘Open’, refer to the documentation provided with Windows.

Conventions Used in This Manual

The following notational conventions are used in this manual:

| Convention | Meaning |
|-----------------------|---|
| [XXX (A)] – [YYY (B)] | Select YYY from the XXX menu. You can also perform the same command on the keyboard by pressing the A key and then the B key while holding down the Alt key. |
| [X] [X] + [Y] | Press the X key on the keyboard. On the keyboard, press the Y key while holding down the X key. |
| “XXXXX” | Messages displayed on the screen are enclosed in “ ”. |
| [XXX] button | Buttons displayed on the screen are enclosed in []. |

System Requirements

The hardware and software items listed below are required for using M-1 Pro II PC.

■ Compatible operating systems

Windows 98 (English)
Windows Me (English)
Windows NT (English)
Windows 2000 (English)
Windows XP (English)
Windows Vista (English)

❖ If you are using Windows Vista/XP/2000/NT, be sure to log on as a member of Administrators when starting up.

■ Computer

A computer that supports any of the above operating systems.

■ Monitor and video driver

A Monitor capable of 800 x 600 dots resolution and 256 color display or higher.
1024 x 768 recommended.

❖ When using an 800 x 600 dot monitor, set the display font size to "Small Fonts".

■ Memory

At least the recommended amount of memory for the operating system.

Installing

Installing M-1 Pro II PC and the Printer Driver

Install M-1 Pro II PC and the printer driver for the M-1 Pro II into your computer. This section describes how to install M-1 Pro II PC and the printer driver using Windows 2000 as an example.


- ❖ Close all applications before installing the software.
- ❖ If you are using Windows Vista/XP/2000/NT, be sure to log on as a member of Administrators when starting up.
- ❖ Windows Vista/ XP allows multiple users to use one computer at the same time. However, only one user can log on to the computer when making settings.

1. Have ready the installation CD-ROM that contains the software.
2. Turn on your computer and start Windows.
3. Insert the CD-ROM to install the software into your CD-ROM drive.
 - ❖ If the CD-ROM does not start automatically, double-click on the CD-ROM drive icon.
4. Install the Application Software.
 - Windows XP/2000/NT/Me/98
The Installation menu appears.
Click the [Install the Application Soft] button.




- Windows Vista


When the “AutoPlay” screen appears, click [Run LaunchM1.exe].

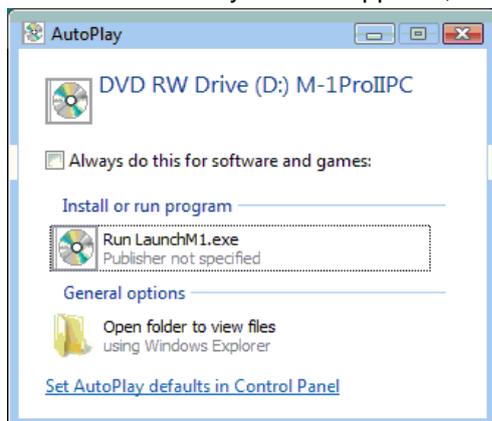

When the “User Account Control” dialog box appears, click the [Continue] button.

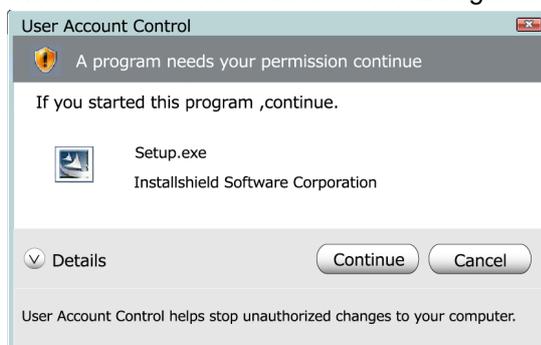


(1) Click the [Next] button.

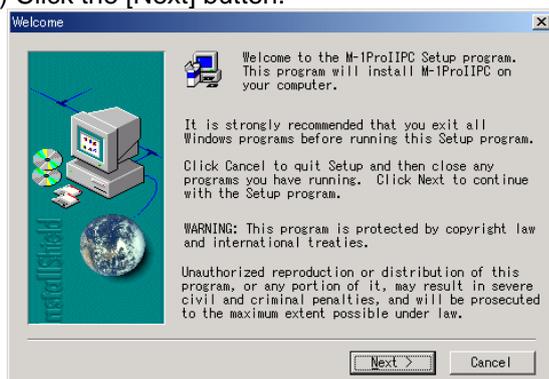

(2) The “Software License Agreement” screen appears.


- Windows XP/2000/NT/Me/98

Read the Software License Agreement, click the [Yes] button.

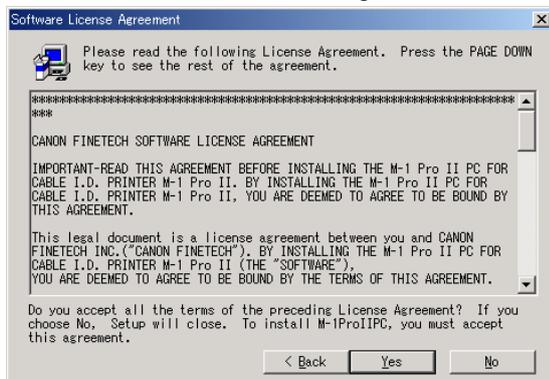


- Windows Vista

Read the Software License Agreement, select “I accept the terms of the license agreement” and then click the [Next] button.

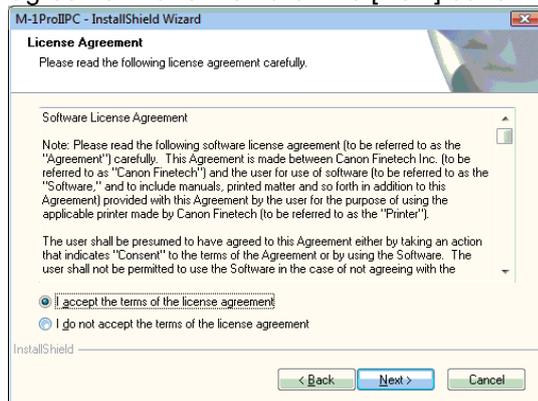

(3) Specify the destination for installation and then click the [Next] button.


- To install the software in the folder displayed in “Destination Folder”, click the [Next] button.
- To install the software in a different folder, click the [Browse] button and specify a folder.

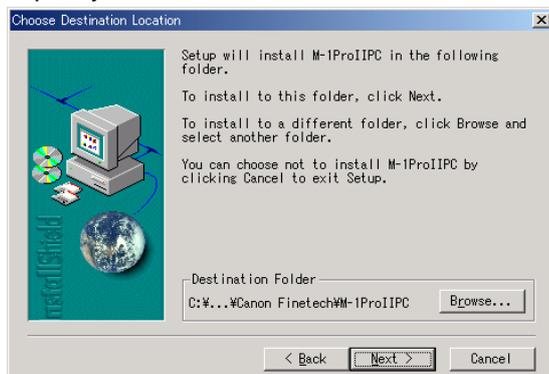

(4) Follow the instructions on the screen to complete the installation.


- Windows XP/2000/NT/Me/98

The “Select Program Folder” screen appears.
Click the [Next] button.

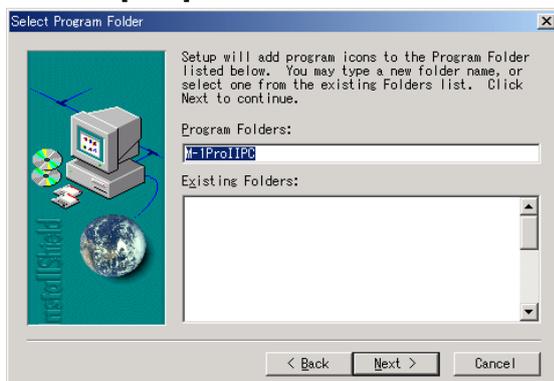


- Windows Vista

The “Ready to Install the Program” screen appears.
Click the [Install] button.

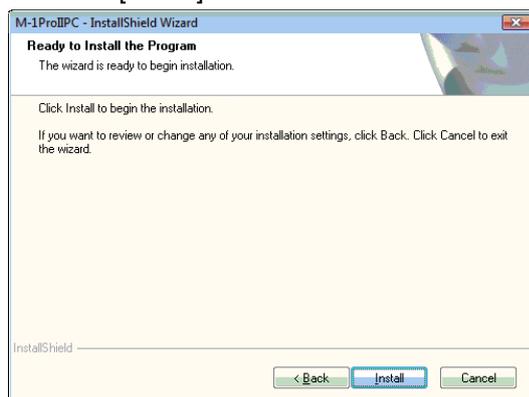

(5) Click the [Finish] button.

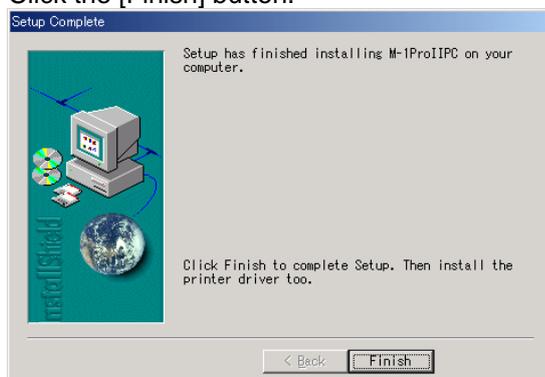


This completes the Application Software installation.
Next, Install the Printer Driver.


5. Install the Printer Driver.

- Windows XP/2000/NT/Me/98

Click the [Install the Printer Driver] button of the installation menu.

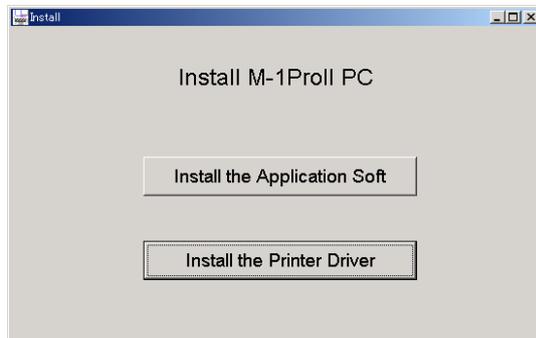

Click the  button.

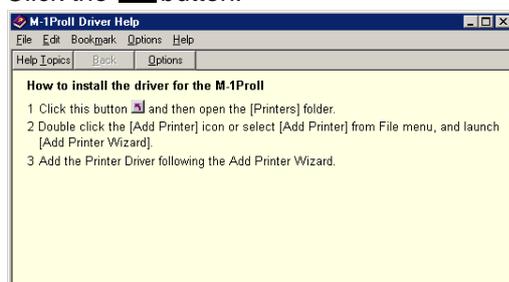

The "Printers" folder opens. Double-click the [Add Printer] icon.




The "Add Printer Wizard" starts. Click the [Next] button.




- Windows Vista


The “Printers” folder opens. Click the [Add a printer] button.

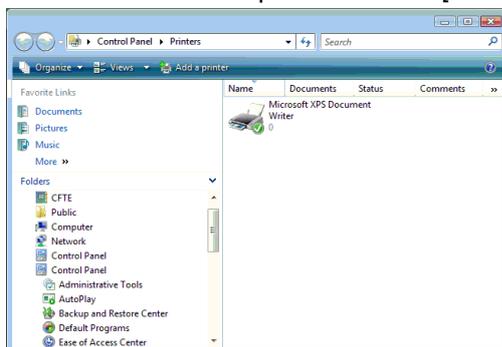


(1) Select “Local printer” and then click the [Next] button.

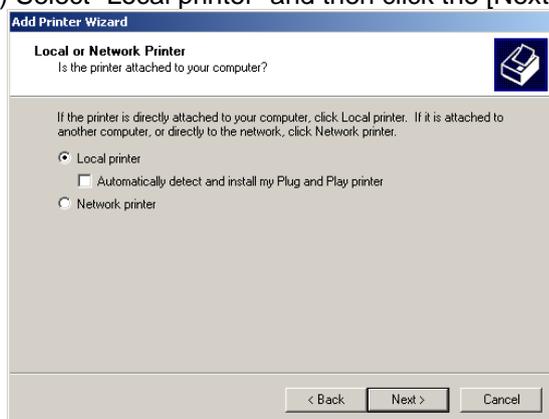

(2) Select the port that you want to use and then click the [Next] button.

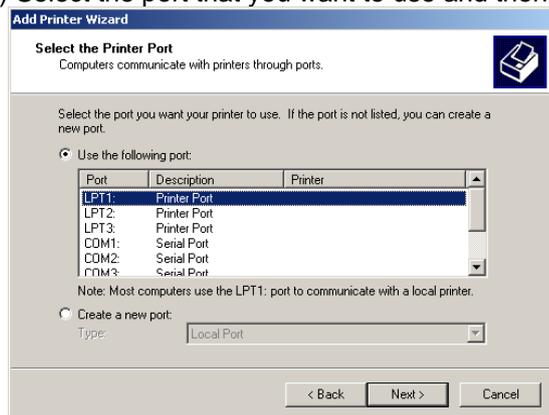

(3) Click the [Have Disk...] button.

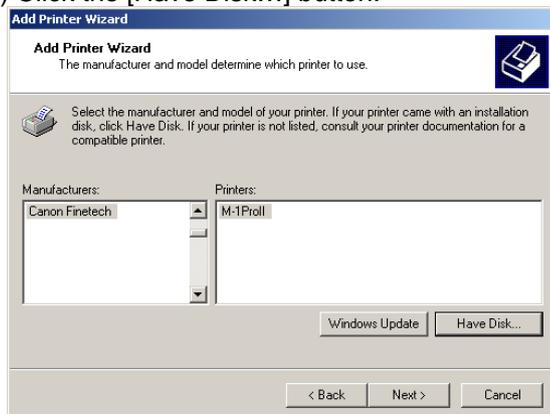

(4) Click the [Browse...] button.



Select [DRV] folder – [2KXP] folder – [Pro I12ke.inf] file on the CD-ROM, and then click the [Open] button.




- ❖ The folders you select differ according to the operating system you are using.
 - With Windows 98 or Windows Me, select the [9XME] folder – [ProI19xe.inf] file.
 - With Windows 2000 or Windows XP, select the [2KXP] – [ProI12ke.inf] file.
 - With Windows NT, select the [NT40] folder – [ProI1Nte.inf] file.
 - With Windows Vista, select the [VISTA] folder – [ProI1vte.inf] file.

(5) Click the [OK] button.



(6) Select "M-1 Pro II" as the printer, and then click the [Next] button.

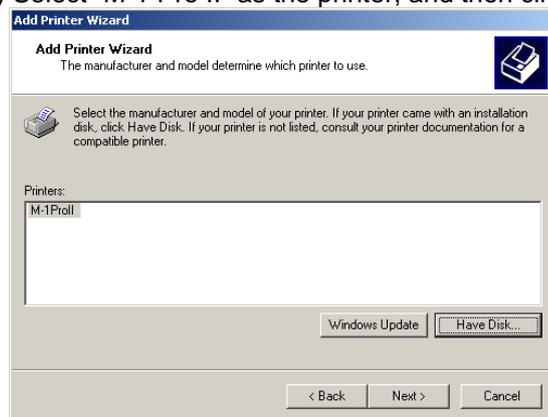

❖ The following screen only appears if a printer driver is already installed in the system.


- Windows XP/2000/NT/Me/98

Select "Replace existing driver" and then click [Next] button.




- Windows Vista

Select "Replace the current driver" and then click [Next] button.

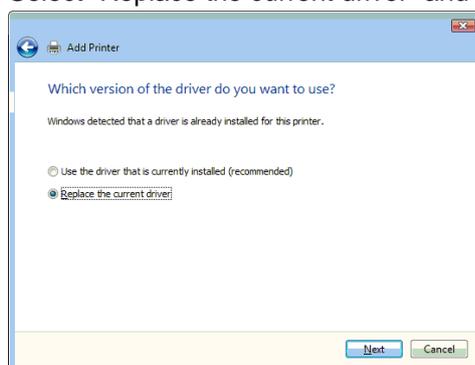

(7) Click the [Next] button.

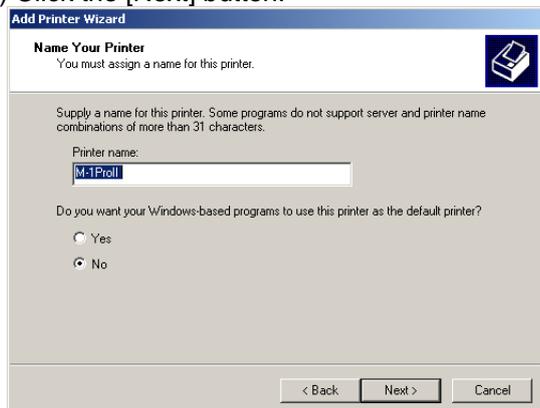

The screenshot shows the 'Name Your Printer' dialog box in the 'Add Printer Wizard'. The title bar reads 'Add Printer Wizard'. The main heading is 'Name Your Printer' with a sub-heading 'You must assign a name for this printer.' and a printer icon. Below this, a note states: 'Supply a name for this printer. Some programs do not support server and printer name combinations of more than 31 characters.' A text box labeled 'Printer name:' contains the text 'M-1Proll'. Below the text box, a question asks: 'Do you want your Windows-based programs to use this printer as the default printer?' with two radio button options: 'Yes' and 'No', where 'No' is selected. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'.

❖ Never change the printer name. Should you change it, print data is not properly sent to the printer and prints fail.


(8) Follow the instructions on the screen to complete the installation.

Select "Do not share this printer" in the "Printer Sharing" screen, and then click [Next] button.



The screenshot shows the 'Printer Sharing' dialog box in the 'Add Printer Wizard'. The title bar reads 'Add Printer Wizard'. The main heading is 'Printer Sharing' with a sub-heading 'You can share this printer with other network users.' and a printer icon. Below this, a note states: 'Indicate whether you want this printer to be available to other users. If you share this printer, you must provide a share name.' There are two radio button options: 'Do not share this printer' (which is selected) and 'Share as:'. The 'Share as:' option has an empty text box next to it. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'.

Select "No" in the "Print Test Page" screen, and then click [Next] button.

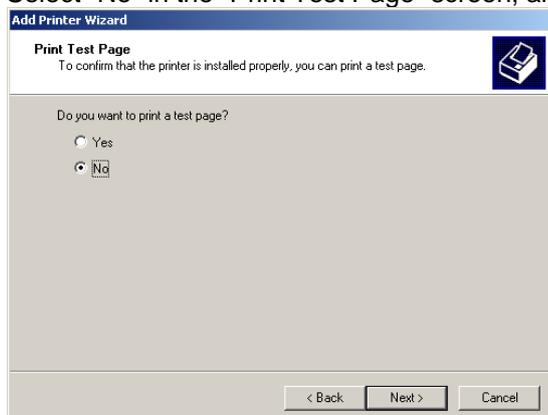

The screenshot shows the 'Print Test Page' dialog box in the 'Add Printer Wizard'. The title bar reads 'Add Printer Wizard'. The main heading is 'Print Test Page' with a sub-heading 'To confirm that the printer is installed properly, you can print a test page.' and a printer icon. Below this, a question asks: 'Do you want to print a test page?' with two radio button options: 'Yes' and 'No', where 'No' is selected. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'.

- (9) Click the [Finish] button.





- ❖ If you are using Windows 2000 and the message “Digital Signature Not Found” appears, click the [Yes] button. (The printer driver will not be installed if you click the [No] button.)




- ❖ When the following screen appears with Windows XP, click the [Continue Anyway] button. (The printer driver will not be installed if you click the [Stop Installation] button.)



- ❖ When the following screen appears with Windows Vista, click the [Continue] button and select “Install this driver software anyway”. (The printer driver will not be installed if you click the [Cancel] button and select “Don’t install this driver software”.)

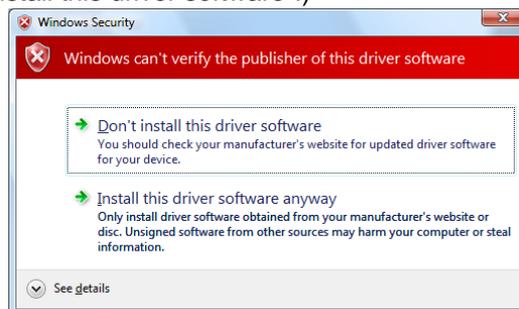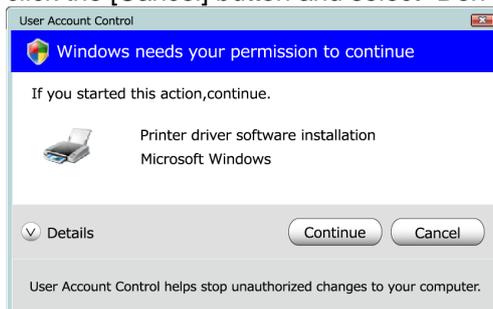

(10) The M-1 Pro icon is added to the “Printers” folder.

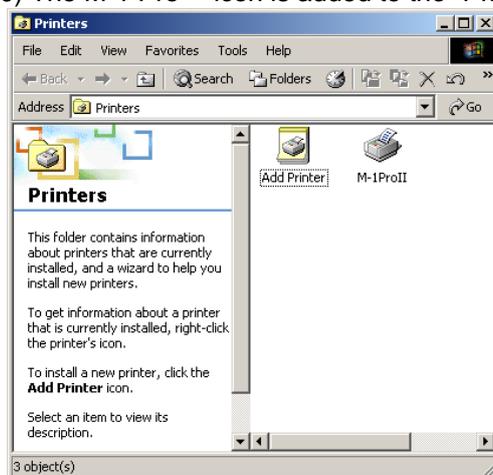

This completes the Printer Driver installation.

6. Restart your computer.

Installing the Printer Driver at a Later Time

Follow the procedure below to install the driver for the M-1 Pro II at a later time. Restart your computer after installing the printer driver.

- Windows 2000/NT/Me/98
Click the [Start] button, and select [Settings] – [Printers]. Next, double-click the [Add Printer] icon to start the “Add Printer Wizard” and install the printer driver.
- Windows XP
Click the [Start] button, and select [Control Panel] – [Printers and Other Hardware] – [Add a printer], to start the “Add Printer Wizard” and install the printer driver.
- Windows Vista
Click the [Start] button, and select [Control Panel] – [Hardware and Sound] – [Printers]. Next, click the [Add a printer] button and install the printer driver.

Uninstalling the Software

- Windows 2000/NT/Me/98
Click the [Start] button, select [Settings] – [Control Panel], and then double click the [Add/Remove Programs] icon. Next, select [M-1 Pro II PC] from the list, and then click the [Add/Remove] button. When the confirmation message appears, click the [Yes] button.
- Windows XP
Click the [Start] button, and then select [Control Panel] – [Add or Remove Programs]. Next, select [M-1 Pro II PC] from the [Currently installed programs] list, and then click the [Change/Remove] button. When the confirmation message appears, click the [OK] button.
- Windows Vista
Click the [Start] button, select [Control Panel] – [Programs], and then click [Uninstall a program]. Next, select [M-1 Pro II PC] from a list of the programs, and then click the [Uninstall/Change] button. When the confirmation message appears, click the [OK] button. (When the “User Account Control” dialog box appears, click the [Continue] button.)


Starting M-1 Pro II PC

Starting

You can start M-1 Pro II PC by one of the following methods:

- Double-click the [M-1Pro II PC] icon on the desktop.
- Click the [Start] button, and then select [All Programs] or [Programs] – [M-1Pro II PC] – [M-1Pro II PC].

The main screen appears when you start M-1 Pro II PC.

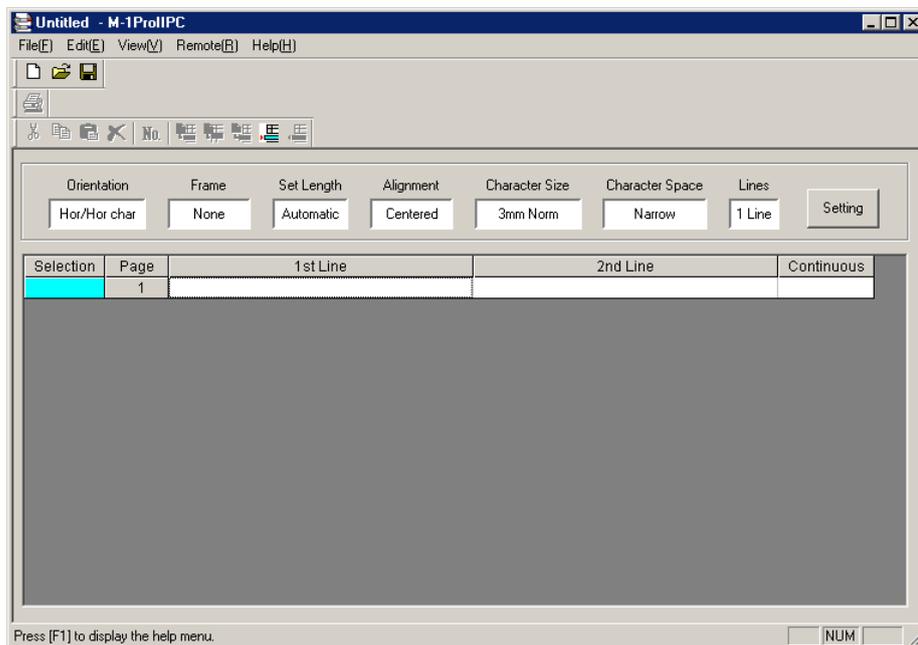


For details of the main screen parts, refer to “Screen Structure” below.

Shutting Down

You can shut down M-1 Pro II PC by one of the following methods:

- Select [File (F)] – [Exit (X)].
- Click the upper right of the main screen.
- ❖ If you are editing data when you shut down M-1 Pro II PC, a message asking whether to save the data appears.

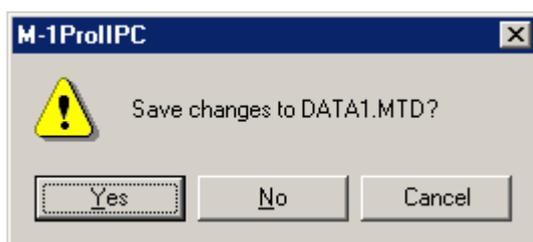


Screen Structure

This section describes details of the tool buttons and menus contained in M-1 Pro II PC.

Main Screen

This appears when you start M-1 Pro II PC.

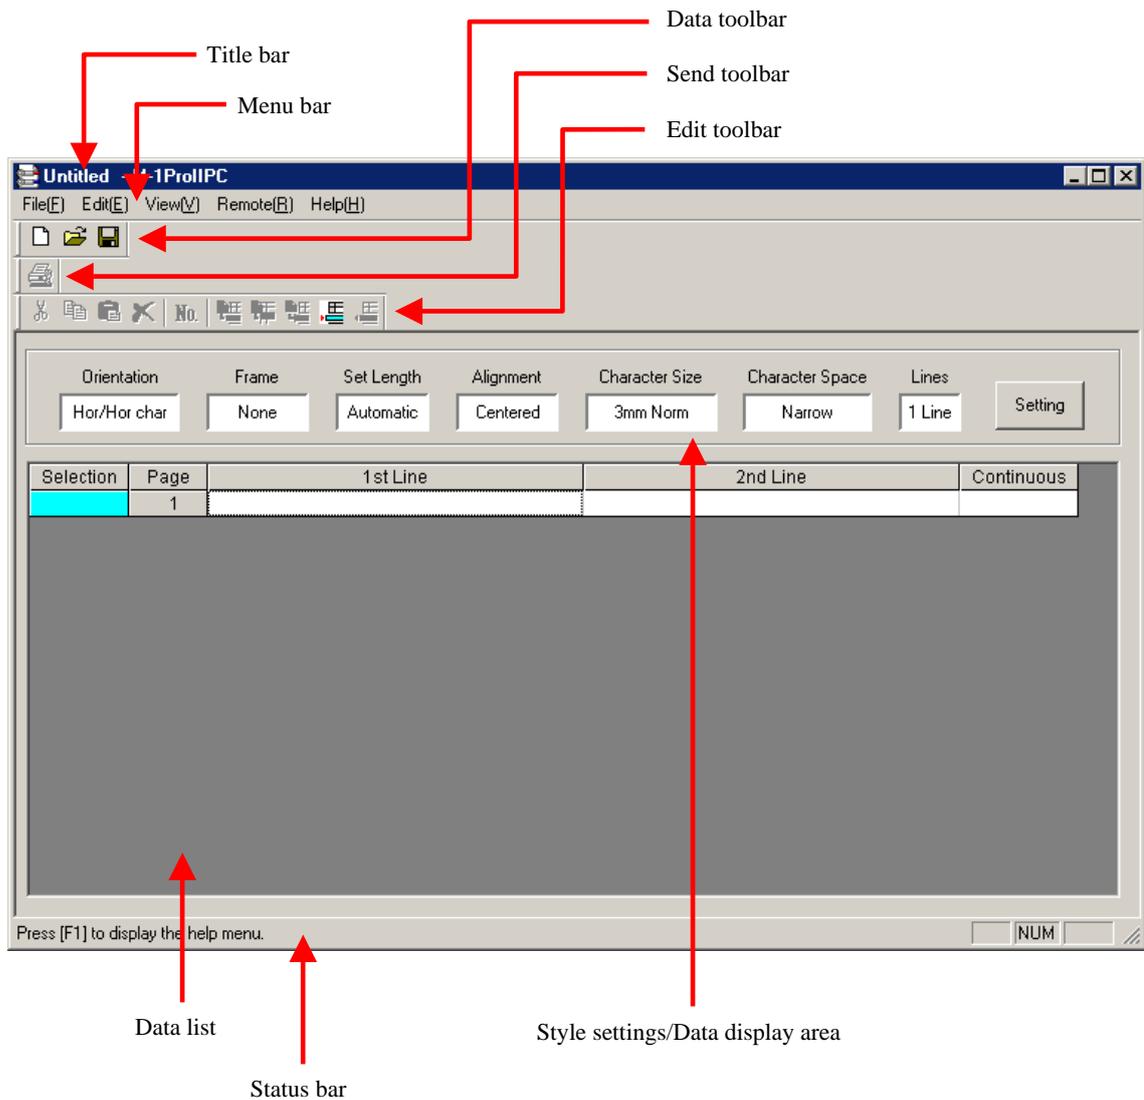

f.g.1 Main screen

Toolbar

The toolbar contains the following buttons.

| Tool button | Description |
|---|--|
|  | Creates a new data list. Does the same thing as selecting [New] from the [File] menu. ❖ If you are editing data, a message asking whether to save the data appears. |
|  | Opens an existing file or CSV file and loads the data. Does the same thing as selecting [Open] from the [File] menu. ❖ If you are editing data, a message asking whether to save the data appears. |
|  | Saves the data you are editing in an existing file. Does the same thing as selecting [Save] from the [File] menu. |
|  | Sends the data you are editing to the M-1 Pro II. Does the same thing as selecting [Send] from the [File] menu. |
|  | Sets a numbering and adds numbering data to the specified pages. Does the same thing as selecting [Numbering] from the [Edit] menu. |
|  | Inserts a blank page in front of the cursor page. Does the same thing as selecting [Page Insert] from the [Edit] menu. |
|  | Deletes the cursor page. Does the same thing as selecting [Page Delete] from the [Edit] menu. |
|  | Cuts the specified page and pastes it to the clipboard. Does the same thing as selecting [Page Cut] from the [Edit] menu. |
|  | Copies the contents of the specified page to the clipboard. Does the same thing as selecting [Page Copy] from the [Edit] menu. |
|  | Pastes the contents of the clipboard by inserting it in front of the specified page. Does the same thing as selecting [Page Paste] from the [Edit] menu. |

Style Settings/Data Display Area

This area displays current format settings. To change the format settings, click the [Setting] button.

For details about settings, refer to “Format Settings” in “Basic Operations.”

Data List

This is a list of files currently being edited.

Menu Bar

The Menu bar contains the following menus.


File(F) Edit(E) View(V) Remote(R) Help(H)

■ [File] menu

| | |
|---------------|--------|
| New(N) | Ctrl+N |
| Open(O)... | Ctrl+O |
| Add(L)... | |
| Save(S) | Ctrl+S |
| Save As(A)... | Ctrl+A |
| Send(P)... | Ctrl+P |
| Exit(X) | |

| Menu item | Description |
|-------------|--|
| New (N) | Creates a new data list. There is also the  button that performs this function. ❖ If you are editing data, a message asking whether to save the data appears. |
| Open (O) | Opens an existing file or CSV file and loads the data. There is also the  button that performs this function. ❖ If you are editing data, a message asking whether to save the data appears. |
| Add (L) | Opens another file and adds the data to the data you are editing. |
| Save (S) | Saves the data you are editing in an existing file. There is also the  button that performs this function. |
| Save As (A) | Saves the data you are editing in a new file with a name that you assign. |
| Send (P) | Sends the data you are editing to the M-1 Pro II. There is also the  button that performs this function. |
| Exit (X) | Shuts down M-1 Pro II PC. |

■ [Edit] menu

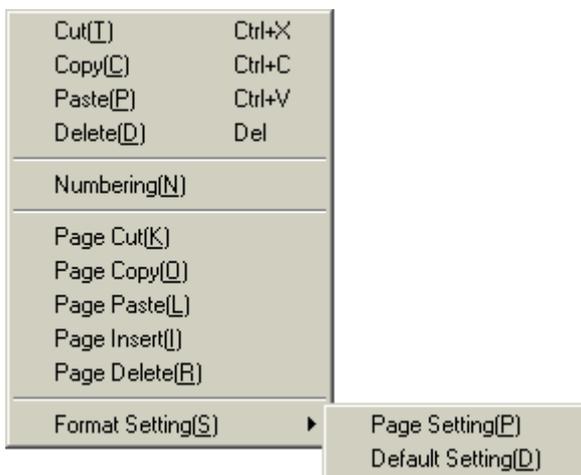

| Menu item | Description | |
|--------------------|---|---|
| Cut (T) | Cuts the specified data and pastes it to the clipboard. | |
| Copy (C) | Copies the selected contents to the clipboard. | |
| Paste (P) | Pastes the contents of the clipboard. | |
| Delete (D) | Deletes the selected part. | |
| Numbering (N) | Sets a numbering and adds numbering data to the specified pages. There is also the  button that performs this function. | |
| Page Cut (K) | Cuts the specified page and pastes it to the clipboard. There is also the  button that performs this function. | |
| Page Copy (O) | Copies the contents of the specified page to the clipboard. There is also the  button that performs this function. | |
| Page Paste (L) | Pastes the contents of the clipboard by inserting it in front of the specified page. There is also the  button that performs this function. | |
| Page Insert (I) | Inserts a blank page in front of the cursor page. There is also the  button that performs this function. | |
| Page Delete (R) | Deletes the cursor page. There is also the  button that performs this function. | |
| Format Setting (S) | Page Setting (P) | Changes the format settings for the cursor page. |
| | Default Setting (D) | Sets the default format to be used when creating new data lists or inserting pages. |

■ [View] menu



| Menu item | Description |
|------------------|----------------------------------|
| Data Toolbar (1) | Shows or hides the data toolbar. |
| Send Toolbar (2) | Shows or hides the send toolbar. |
| Edit Toolbar (3) | Shows or hides the edit toolbar |
| Status Bar (S) | Shows or hides the status bar. |

■ [Remote] menu



| Menu item | Description |
|-----------------|--|
| Start Print (P) | Sends a print command to the M-1 Pro II. |
| Save Data (S) | Sends a save data command to the M-1 Pro II. |

■ [Help] menu



| Menu item | Description |
|-----------------------|---|
| Help F1 | Displays M-1 Pro II PC help. |
| About M-1Pro II PC(A) | Displays M-1 Pro II PC version information. |

Status Bar

Displays the current status of the M-1 Pro II PC.

Operating M-1 Pro II PC

File Types

With M-1 Pro II PC, you can load the following file types into the data list.


- Original data files (.mtd)
- CSV files (Comma separated text files)

To load data into the data list, files must meet the following conditions:

- 1st line: First line of character data
- 2nd line: Second line of character data
- 3rd line: Number of continued printing

❖ Data from and including the 4th line is ignored.

(E.g.1) Loading CSV data into M-1 Pro II PC

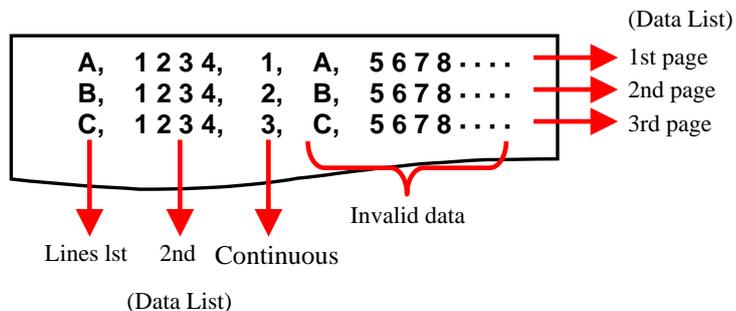

(E.g.2) CSV data from e.g.1 loaded into the data list.


| Page | 1st line | 2nd line | Continuous |
|------|----------|----------|------------|
| 1 | A | 1 2 3 4 | 1 |
| 2 | B | 1 2 3 4 | 2 |
| 3 | C | 1 2 3 4 | 3 |
| | | | |

Basic Operations

This section describes the methods for creating new data lists, creating data lists from existing data and sending data to the M-1 Pro II.

Creating a New Data List

1. Click [New] in the [File] menu or click the  button.
A new data list is created.
The format set in [Format Setting] – [Default Setting] in the [Edit] menu is used.
- ❖ If you are editing data, a message asking whether to save the data appears.

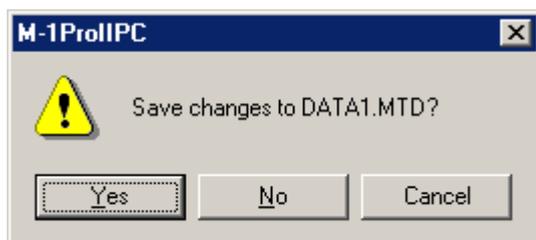


- [Yes]: Saves the data you are editing and creates a new data list.
If the file already has a name, it is overwritten.
If the file does not have a name, the [Save As] dialog box appears, where you can give the file a name.
- [No]: Creates a new data list without saving the data you are editing.
- [Cancel]: Cancels the [New] command.

Opening Existing Files


You can load your own original data files (.mtd) or CSV files into the data list.

1. Click [Open] in the [File] menu or click the  button. The [Open] dialog box appears.

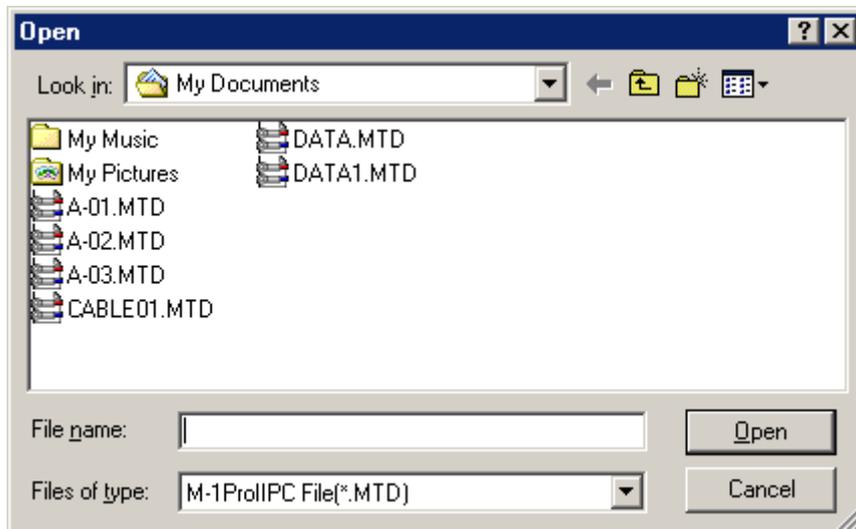


2. Select an original data file (.mtd) or CSV file, and then click the [Open] button. The selected file is loaded and displayed in the data list. The format set in [Format Setting] – [Default Setting] in the [Edit] menu is used.

❖ If you are editing data, a message asking whether to save the data appears.

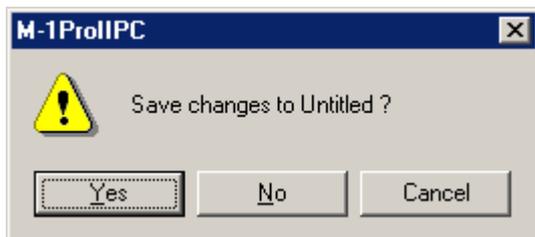

- [Yes]: Saves the data you are editing and creates a new data list. If the file already has a name, it is overwritten. If the file does not have a name, the [Save As] dialog box appears, where you can give the file a name.
- [No]: Opens the selected file without saving the data you are editing.
- [Cancel]: Cancels file loading.

- When you select a CSV file, the [Format Setting] dialog box appears. For details about individual setting items, refer to “Format Settings”.

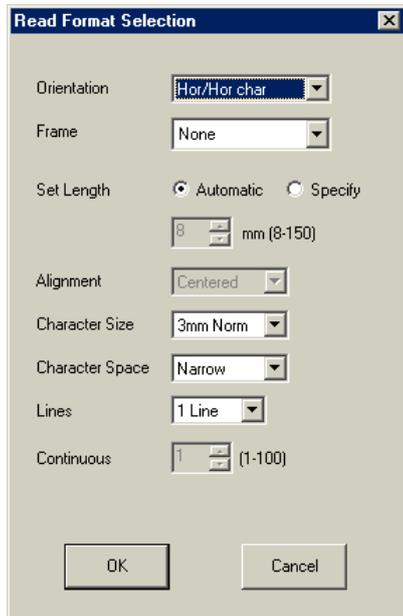

- ❖ If you select [1 Line] in [Lines], the first line of data in the CSV file is loaded, but the second line is ignored.

Loading Additional Data

You can add data to a specified position in the data list.

- Select the file you want to add, and then click the [Open] button. The [Open] dialog box appears.
- Select the file you want to add, and then click the [Open] button. The data in the selected file is added at the cursor position.

Saving Data Lists

■ Overwriting when saving

- Click [Save] in the [File] menu or click the  button. The file you are editing is overwritten.

- ❖ If “Untitled” appears in the title bar, the [Save As] dialog box appears. For details about saving the file, refer to “Saving a file with a new name”.


■ Saving a file with a new name

- Select [Save As] from the [File] menu. The [Save As] dialog box appears.

- Input the file name, specify the file type, and then click the [Save] button. Select the file type from the following: The contents that are saved depend on the file type.


[Original data files (.mtd)] Saves format settings and data list contents.

[CSV file]: Saves the first and second lines of character data in the data list, and the numbering value.

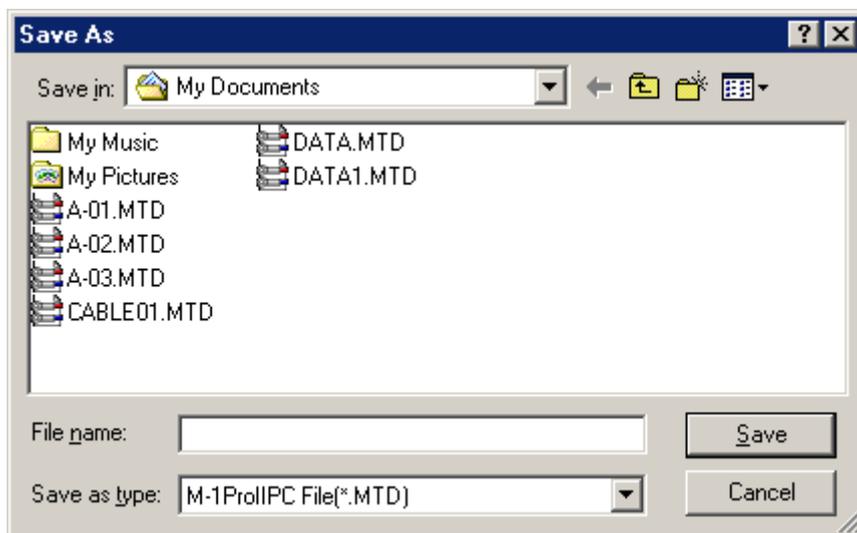

The data list is saved with the file name you assigned.

- ❖ If a file already exists with the same name as the one you input, a message appears asking whether it is ok to overwrite the existing file.

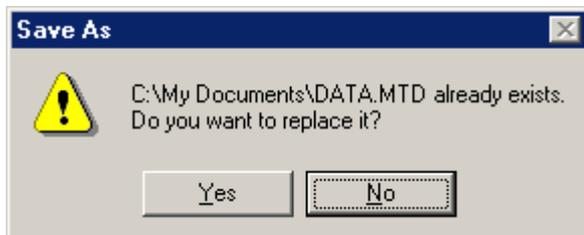


[Yes]: The file is overwritten.

[No]: The file is not saved.

Sending Data to the Printer

You can send data you create with M-1 Pro II PC to the M-1 Pro II. This section also describes settings for saving and printing sent data.

1. Click [Send] in the [File] menu or click the  button. The [Data Transfer] dialog box appears.
2. Set each of the items.

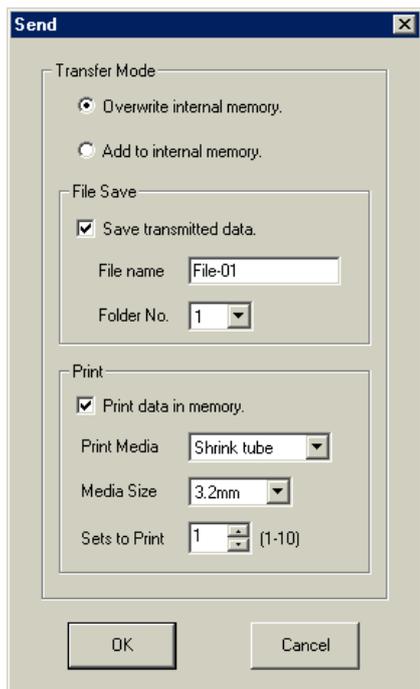

[Transfer Mode]

[Overwrite internal memory.]:

Clears the document area in the printer, and saves the transmitted data at the beginning of the document area.

[Add to internal memory.]:

Adds the sent data at the end of the last page in the printer.
(The printer adds new pages to the data in the printer.)

[File Save]

[Save transmitted data.]:

When this option is selected, after list data is sent to the printer, data in the printer's document area is saved under the specified file name(s) in the specified folder(s) of the printer's storage area. If you do not select this the data will not be saved.

[File name]:

Inputs the file name.

[Folder No.]:

Selects the folder number (from 1-3) for saving data.

[Print]

[Print data in memory.]:

Select this to print data stored in the printer's memory after sending, according to settings you specify.

If you do not select this the data will not be printed.

- [Print Media]: Selects the type of printing media.
Select either Tube, Shrink Tube, Label, 4mm I.D. Strip, Clear Tube, Wrap Around or Terminal I.D.
- [Media Size]: Selects the size of printing media.
The sizes you can select depend on the type of printing media used.
- | | |
|----------------|------------------------------------|
| Tube | : 2.5, 3.0, 4.0, 5.0, 6.0 or 6.5mm |
| Shrink Tube | : 3.0, 3.2, 4.8, 6.0 or 6.4mm |
| Label | : 6.0, 9.0, 12.0mm |
| 4mm I.D. Strip | : Size not selectable. |
| Clear Tube | : 2.5, 3.0, 4.0, 5.0, 6.0 or 6.5mm |
| Wrap Around | : Size not selectable. |
| Terminal I.D. | : 8.0, 8.5, 9.0, 9.5 or 10.0mm |
- [Sets to Print]: Selects the number of items to be printed.
Select from 1-10.


- 3.** Click the [OK] button.
Format settings and data list contents are sent to the printer.
- If there is no data when you click the [OK] button, “No character data” appears.
 - Click the [Cancel] button to cancel data transfer and close the dialog box.

Creating Numbering

This section describes how to incorporate numbering into the current page in the data list, create pages for printing according to these values and add the pages to a data list.

❖ This function for creating numbering is the same as the function in the M-1 Pro II.

1. Click [Numbering] in the [Edit] menu or click the **No.** button.
The [Numbering] dialog box appears.
2. Set each of the items.

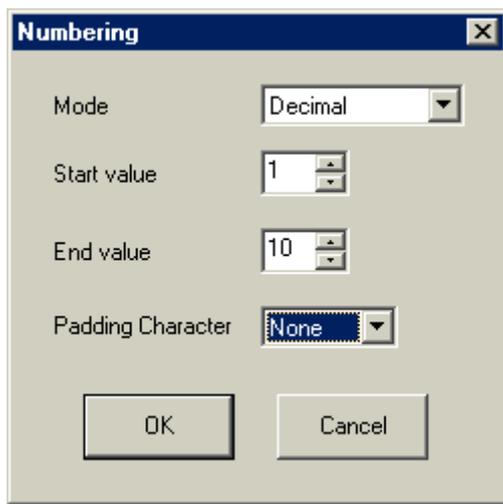

- [Mode]: Selects the mode of numbering.
Select from Decimal, Hexadecimal, A to Z or a to z.
The numbering range you can select depends on the numbering mode.
Decimal: 0 - 99 (0 - 9 for single digit)
Hexadecimal: 0-FF (0 - F for single digit)
A to Z: A to Z
a to z: a to z
- [Start value],
[End value]: Selects the start and end values for the numbering.
Select from Decimal, Hexadecimal, A to Z or a to z.
❖ If the start value is higher than the end value, the numbering will be in descending order.
- [Padding Character]: Selects digit matching method.
Select from None, Zero, or Space.

❖ The character string length is checked when creating a numbering. When it is no longer possible to input characters, "Length exceeded. Input data exceeds set length." appears.

3. Click the [OK] button.
A numbering is created in the data list using the numbering information from the cursor page.
 - Click the [Cancel] button to quit numbering creation and close the dialog box.
- ❖ To delete a numbering, select the page in the data list, and then select [Delete] from the [Edit] menu.

Format Settings

This section describes format setting items and settings procedures.


You can set formats for individual pages, and there is also a default format used when creating or inserting new pages.

The procedure for setting a format for an individual page is described here. The procedure for setting the default format is the same.

❖ If you try to change the different page format by selecting more than one page in the data list, the settings will revert to the unset state (become blank settings).

1. In the data list, select the page whose format you want to change, and then select [Format Setting] – [Page Setting] from the [Edit] menu.
To change the default format, select [Format Setting] – [Default Setting] from the [Edit] menu.
The [Format Setting] or [Default Setting] dialog box appears.

2. Set each of the items.

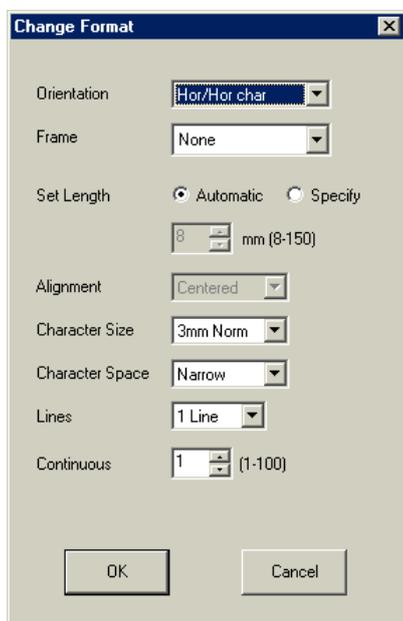

[Orientation]: Selects the orientation for printing.
Select from Hor/Hor char, Vert/Vert char or Vert/Hor char.
The default at installation is [Hor/Hor char].
[Vert/Hor char] print is only available when there are no characters input.

[Frame]: Selects the type of frame to surround the characters.
Select from None, , , ,  or .

The default at installation is [None].
[Set Length]: Selects the length of tube to be cut.
With [Specify] selected, you can specify a length from 8-150mm.
Select this to calculate the character string length from the character size, character space, frame and lines and fit the character string within the cut length.
The default at installation is [Automatic].

- [Alignment]: Selects way in which characters are aligned.
Select either Centered, Left 2mm, Left 3mm, Left 4mm or Left 5mm.
You cannot select [Centered] when [Automatic] is selected for [Set Length].
The default at installation is [Centered].
- [Character Size]: Selects the size of the characters.
Select either 2mm Half, 2mm Norm, 3mm Half, 3mm Norm, 6mm Half or 6mm Norm.
The default at installation is [3mm Norm].
- [Character Space]: Selects the space between characters.
Select from Narrow, Medium, or Wide.
The default at installation is [Narrow].
- [Lines]: Selects the number of lines.
Select either 1 Line or 2 Lines.
When [Character Size] is set to [6mm Half] or [6mm Norm], the number of lines is automatically set to 1 line. (You cannot change the number of lines.)
The default at installation is [1 Line].
- [Continuous]: Selects the number of items to be printed.
Select from 1-100.


- 3.** Click the [OK] button.
The set length check takes place.
- If there is a page to which the specified settings cannot be applied, a message asking whether to apply the changes only to those pages that can be changed.
 - If the settings cannot be applied to any pages, "Cannot modify." appears.

Remote Operation

Without using the print controls or file functions on the printer, you can operate the printer from M-1 Pro II PC, specify printing media and print, and save data in the printer's document area.

Starting Printing

1. Select [Start Print] from the [Remote] menu.
The [Print] dialog box appears.
2. Set each of the items.
 - ❖ While M-1 Pro II PC is running, the previous settings used are displayed as default settings.

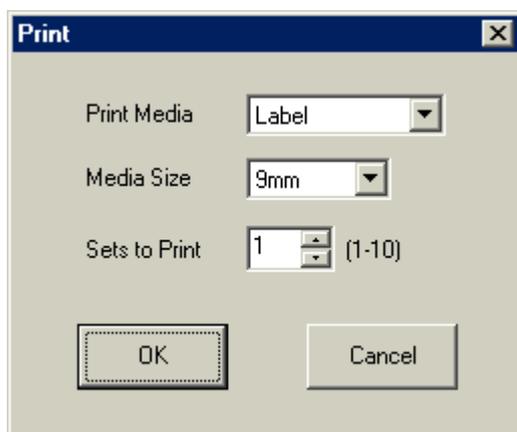


- [Print Media]: Selects the type of printing media.
Select either Tube, Shrink Tube, Label, 4mm I.D. Strip, Clear Tube, Wrap Around or Terminal I.D.
- [Media Size]: Selects the size of printing media.
The sizes you can select depend on the type of printing media used.
- | | |
|---------------|-----------------------------------|
| Tube | :2.5, 3.0, 4.0, 5.0, 6.0 or 6.5mm |
| Shrink Tube | :3.0, 3.2, 4.8, 6.0 or 6.4mm |
| Label | :6.0, 9.0, 12.0mm |
| 4mm I.D.Strip | :Size not selectable. |
| Clear Tube | :2.5, 3.0, 4.0, 5.0, 6.0 or 6.5mm |
| Wrap Around | :Size not selectable. |
| Terminal I.D. | : 8.0, 8.5, 9.0, 9.5 or 10.0mm |
- [Sets to Print]: Selects the number of items to be printed.
Select from 1-10.

3. Click the [OK] button.
The data is sent to the printer.
 - Click the [Cancel] button to cancel printing and return to the main screen.

Saving Print Data

1. Select [Save print data] from the [Remote] menu.
The [Save print data] dialog box appears.
2. Set each of the items.

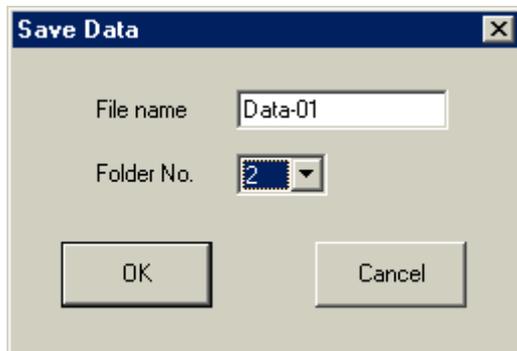

[File name]: Inputs the file name.

[Folder No.]: Selects the folder number (from 1-3) for saving data.

3. Click the [OK] button.
The file name you specified, folder number and save command are sent to the printer.
 - Click the [Cancel] button to cancel data saving and return to the data input screen.